

WATER ABSORB PREVENTION PRODUCT FOR CEMENT MIXTURE

ISHINOL SERIES

***EFFLONON LIQUID***

EFFLONON LIQUID is used mixing it with cement.

It prevents a white phenomenon (Efflorescence) and water absorb prevention product with the long-term durability.

Various problems to assume originating water,

It effects strong of the water absorb prevention by a small amount of put in cement.



### 【EFFECT AND FEATURE】

- EFFLONON LIQUID is used mixing it with cement.
- It prevents a white effect (Efflorescence) and water absorb prevention product with the long-term durability.
- It is the admixture type for cement so water absorb prevention effects not only the surface part of the mortar (Concrete) but also the inside in all the effective.
- It prevents various problems to assume originating water such as white phenomenon (Efflorescence) by a strong effect of the waterproof.
- Mixing with cement, sand, and water together is easy because it is liquid type, the working efficiency is excellent.


### 【USAGE】

- Protection of joint part for tiling and stone work construction. Stone and tiles are prevented efflorescence.
- Water absorb prevention for concrete of the secondary product, dirt prevention, and prevention of efflorescence
- Prevention of water from the under
- Crack prevention by freezing

### 【HOW TO USE】

EFFLONON LIQUID is used for mix with cement at the rate of 2% weight.

(EFFLONON LIQUID 0.8ks(0.8L) is used for one cement bag (about 40kg).)

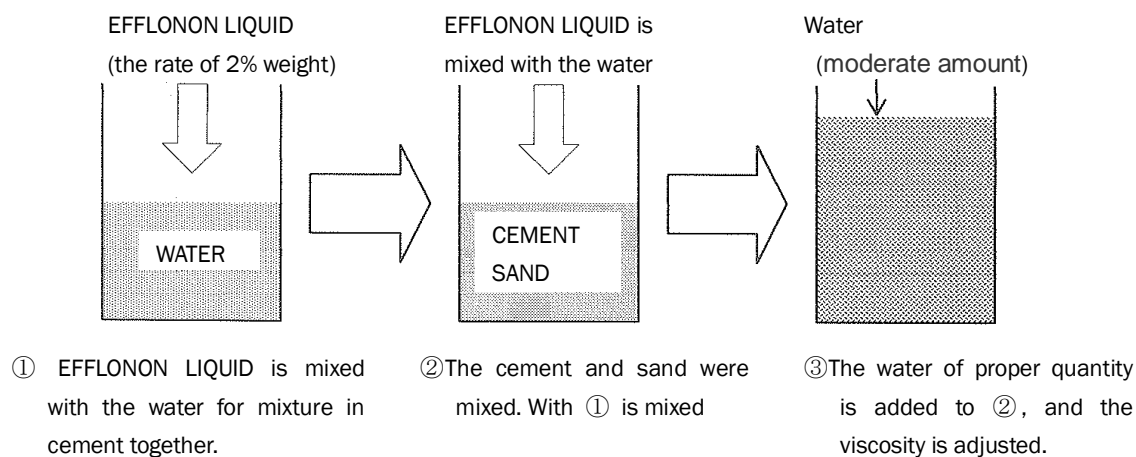

### 【CHARACTERISTICS】

Appearance : Milky white color liquid  
pH : approx. 7  
Specific gravity : approx. 1(g/cm<sup>3</sup>)  
Packing : 10kg carton

### 【NOTE】

- Please keep it over 0 to 30 degrees. (Please note it coagulate under 0 degrees or less.)
- Please shake enough before use if it becomes separate just in case.