




USING THE PROPER STONE CARE PRODUCTS TO PROTECT STONE

ISHICLEAN SERIES

**OIL GETTER**

Stain remover for Paraffin oil / Engine oil

**Before (Engine oil)**



**After**



*KONSHO CO.,LTD.*

## 【USAGE】


<A> For slight stain

Put OIL GETTER( 100% concentration) on the stain, leave for 5 – 6 min.

Brush up with a soft cloth or pad etc.

Leave for about 30 min. The stain can be removed by natural drying.


\* If the stain can not be removed, repeat or try the following <B> or <C>.

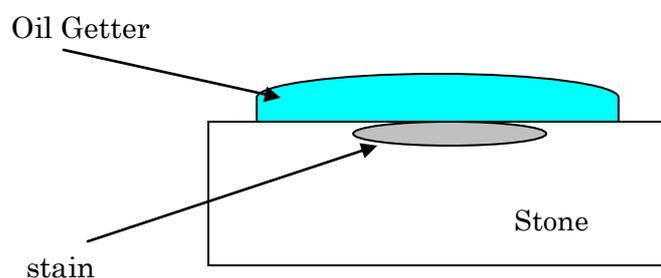

<B> Old Stain

- (1) Mix OIL GETTER with NENDOL and make paste. (The softness is about the earlobe.)
  - (2) Spread the paste and cover the stain completely.
  - (3) To prevent evaporation, cover area with a plastic sheet. Push it from the top of the cover and make it thickness of 5 mm.
  - (4) Leave for over 1 hour.
  - (5) Take the plastic sheet off and leave for over 30 min. to make the paste dry.
  - (6) Remove the paste with a brush.
- After the washing, slight stain may be occurred around the liquid. In this case, put OIL GETTER on it and dry it naturally.
  - NENDOL can not be reused. Used NENDOL is incombustibles.

*KONSHO CO.,LTD.*

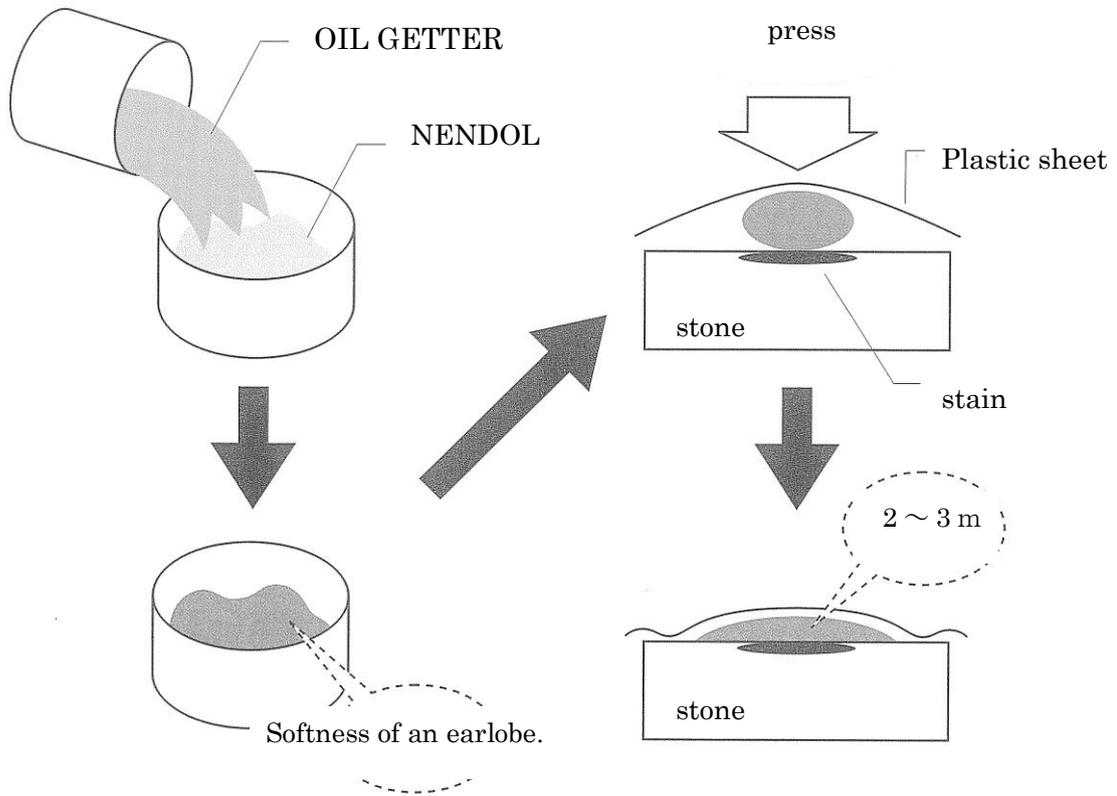


**【STANDARD APPLICATION QUANTITY】**

(A) ...OIL GETTER = 5 - 6 m<sup>2</sup>/liter

(B) ... NENDOL = 1kg (for 1.5 m<sup>2</sup>)

Oil Getter = 2.3 liters

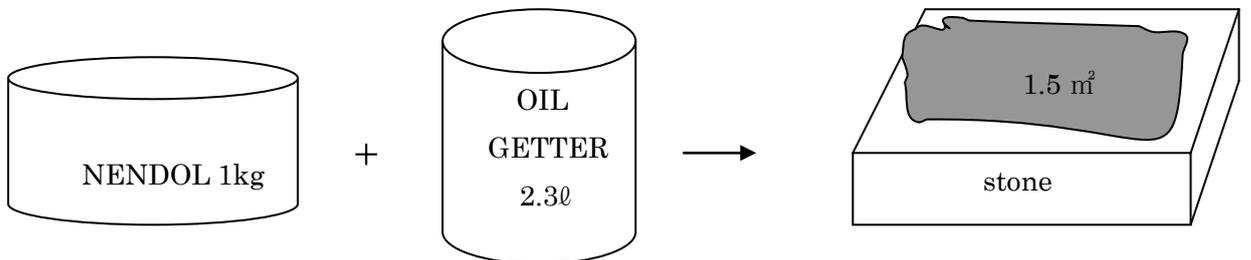

***KONSHO CO.,LTD.***

### 【CHARACTERISTICS】

Appearance: CLEAR COLORLESS LIQUID  
UN Coad: CLASS:Class3 NUMBER:1263  
Handling: Flammable, handle with care  
Flash point : 41℃  
Specific gravity: 0.73  
Packing : 4L×4/1L×6

\* Refer MSDS for other details.

### 【NOTE】

- Ventilate enough
- Wear safety rubber gloves.
- Do not use OIL GETTER besides natural stones.
- OIL GETTER is effective for only oil stains.



*KONSHO CO.,LTD.*