

USING THE PROPER STONE CARE PRODUCTS TO PROTECT STONE

ISHICLEAN SERIES  
**ISHINOL HAKULI**  
Remover for stones and tiles



**Before            After**  
**(Removed WET COAT)**

***KONSHO CO.,LTD.***

## 【USAGE】

- For ISHINOL Series and other silicone protective agent

## 【CHARACTERISTICS】

Appearance : CLEAR COLORLESS LIQUID  
Element : Alkali builder Alcohol solvent  
pH : 12 ~ 13 (1% So1)  
Packing : 18kg/4kg × 4

## 【NOTE】

- Test small out of the way area to confirm effectiveness to the surface.
- Do not use for polished marble or artificial stones.
- Strong alkali agent. Wear safety goggles and clothes if necessary.
- Do not mix or dilute with other liquid or solvent except water.
- Be careful to use during coat because it is very slippery agent.
- Store sealed in a cool and dark place
- Ventilate enough
- Refer MSDS for other details.

## 【STANDARD APPLICATION QUANTITY】

for 1 m<sup>2</sup>

for 1kg of NENDOL

Stain	Product name	ℓ	Weight	Quantity
Vegetable oil Etc.	ISHINOL HAKULI	1.55 ℓ	1.7kg	2.6kg
	NENDOL	---	0.66kgs	1 kg

## 【USAGE】

- It can be used for granite mainly. (Do not use for marble.)
- To use with NENDOL is recommended.

***KONSHO CO.,LTD.***

## 【APPLICATION】


- <MIX> Mix ISHINOL HAKULI and NENDOL well.  
--- mixture ratio---  
Mesurement ratio → ISHINOL HAKULI 1 : NENDOL 0.8 ~ 1  
(The softness of earlobe.)
- ↓
- <APPLY> Cover the area with the mixture. Thickness is 2~3mm.  
Cover with a polyethylene film (wrap) to avoid drying.
- ↓
- <LEAVE> Leave for 3~5 hours.  
Leaving time varies at a situation. (Sometimes more than 5 hours.)
- ↓
- <WASH> Take off the mixture and wash with water thoroughly.

- It is more effective to take off the polyethylene film (Wrap) after leaving ,dry the mixture and wash with water.

NENDOL

ISHINOL  
HAKULI

Put the mixture  
(2~3mm) and cover  
with wrap

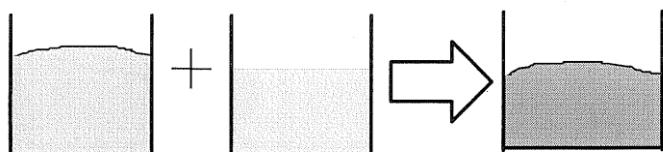

***KONSHO CO.,LTD.***