



A POWDER POULTICE FOR THE REMOVAL OF STAINS

ISHICLEAN SERIES SUBPASTE **NENDOL**

ISHICLEAN Series subpaste NENDOL is a high absorption poultice. NENDOL mixed with water and/or ISHICLEAN Series agents produces a paste that is applied directly to the stained area.

Regular cleaning will not remove the most stubborn stains that have penetrated the surface of the stone. The use of NENDOL will remove the most difficult stains on the surface of stone. It is a neutral substance that will not harm the surface of the most delicate stone.

Subpaste NENDOL used with other ISHICLEAN Series products will produce the best results.



[SUBPASTE NENDOL]


Add water and/or ISHICLEAN Series agents to the powder to produce a paste. After the paste has been thoroughly mixed, place the poultice thickly on the stained surface and compress with a clean cloth.

[SPECIAL FEATURES]

- 1. Removes the most stubborn stains from the stone's surface.
- 2. NENDOL is a neutral powder that can be used on any stone surface.
- 3. NENDOL is easy to use, simply mix with water and/or ISHICLEAN Series.

[How to use NENDOL – refer to lower sketch]


- ① Depending on the stain, select the proper cleansing agent to mix with NENDOL. (ISHICLEAN Series agents are listed in the general catalog.)
- ② The cleansing agent, depending on the stone and stain, use either a 100% concentration or a diluted solution, always wet surface area before application. Apply the poultice to the stained area and cover.
- ③ The ratio of is NENDOL 1, water 2/3 1—mix well producing a paste consistency.
- ④ Spread the cleansing agent on the wet surface, and then place NENDOL paste on stained area (2–3 mm thick). To prevent evaporation, cover area with a plastic sheet.
- \odot Depending on the degree of the stain, leave on the surface for 12-24 hours.
- ® Remove NENDOL, while brushing, use sufficient amounts of water to clean the surface area.

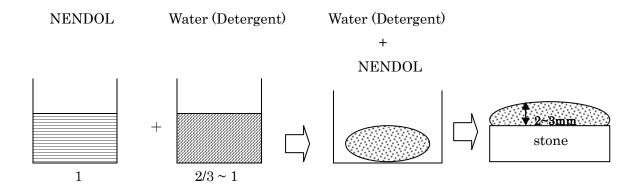

* Depending of the degree of the stain, there may be a need to repeat the process two or three times. NENDOL mixed with other ISHICLEAN Serise agents produces the best results. (Rubber gloves are recommended while during the application.)

The effects of washing with NENDOL

- O Detergent
- Stains
- Removal of stains

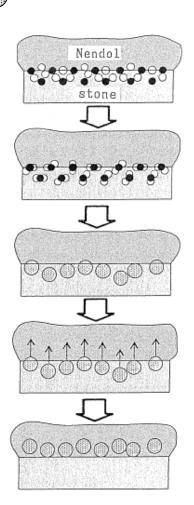

- ① Wet the area with water, applying an ISHICLEAN agent to the surface, then place the NENDOL paste on top of that cover with plastic.
 - ② The paste mixture reacts with the stain.
 - ③ Stains are dissolved.
 - The dissolved stain is absorbed into the NENDOL.
 - ⑤ Stain removed.

ISHICLEAN SERISE

- ISHI-CLEAN SUPER SP (Stains, discoloration a neutral cleanser, therefore, can be used on a variety of stone)
- OIL GETTER (Remover for Paraffin Oil stain.)
- ABURA REMOVER(Remover for Vegetable Oil stain)
- ISHINOL HAKULI (Remover for ISHINOL Series)

[CAUTION]

- 1. While working with NENDOL, use rubber gloves.
- 2. If NENDOL gets in the eye, flush with water an seek medical treatment as soon as possible.
- 3. Store in a dry place, especially, after the package has been open.

Packing: 10 kg/2kg carton box.